

# DX series touch panel



## 1. Technical Specs:

### Dx3 RGB Touch Panel

- Input Voltage: AC100~240V
- Output Signal: RF 2.4G + DMX512
- RF Remote Distance: 30m
- Control Mode: Sync Control
- Working Temperature: -20°C~60°C
- Package Size: L113×W112×H50(mm)
- Weight(N.W.): 225g


### R4-5A CV Receiver

- Input Voltage: DC5V~DC24V
- Max Current Load: 6A × 3CH Max. 18A
- Max Output Power: 90W/216W/432W(5V/12V/24V)
- Working Temperature: -30°C~55°C
- Package Size: L178×W48×H33(mm)
- Weight(G.W.): 150g


### R4-CC CC Receiver

- Input Voltage: DC12V~DC48V
- Output Voltage: DC3V~DC46V
- Output Current: CC 350/700/1050mA×3CH
- Output Power: 1.05W~48.3W×3CH Max 144.9W
- Working Temperature: -30°C~55°C
- Package Size: L178×W48×H33(mm)
- Weight(G.W.): 165g

## 2. Product Size:

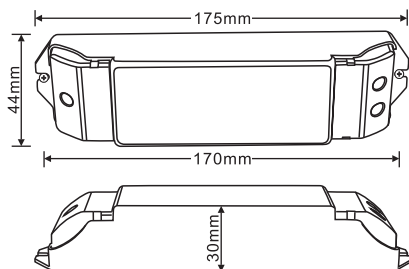

R4-5A/R4-CC Receiver




Touch Panel

## 3. Installation Instruction:




## 4. Key Functions:

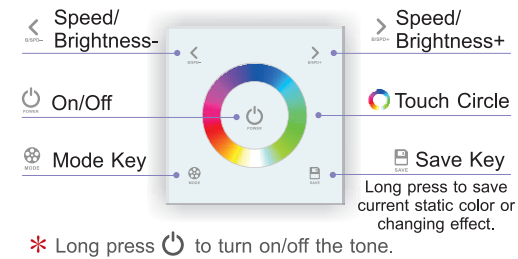


### The Changing Mode (Press to Switch):

- A. Static Red B. Static Green C. Static Blue D. Static Yellow E. Static Purple F. Static Cyan  
G. Static White H. RGB Skipping I. 7 Colors Skipping J. RGB Smooth K. 7 Colors Smooth

## 5. Terminals:

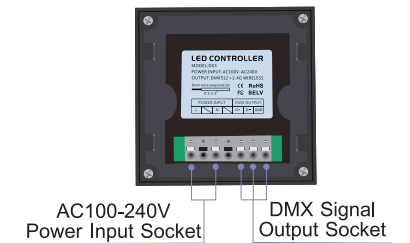

## 6. Operating Instruction for Receiver:

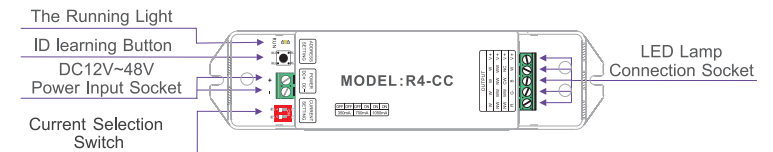

(Operation Table)


OFF	OFF	OFF	ON	ON	ON
350mA	700mA	1050mA			

## 7. The Learning ID Method :

**Learning ID:** Short press "ID learning button" on the R4-5A/R4-CC receiver, the running light keeps on. Then press any key or touch cycle on the DX3 touch panel, the running light flickers several times, activated.

**Canceling ID:** Long press "ID learning button" on the R4-5A/R4-CC receiver for 5s, the running light flickers several times, canceled.

## 8. Wiring Diagram 1 ( Wireless Control ):

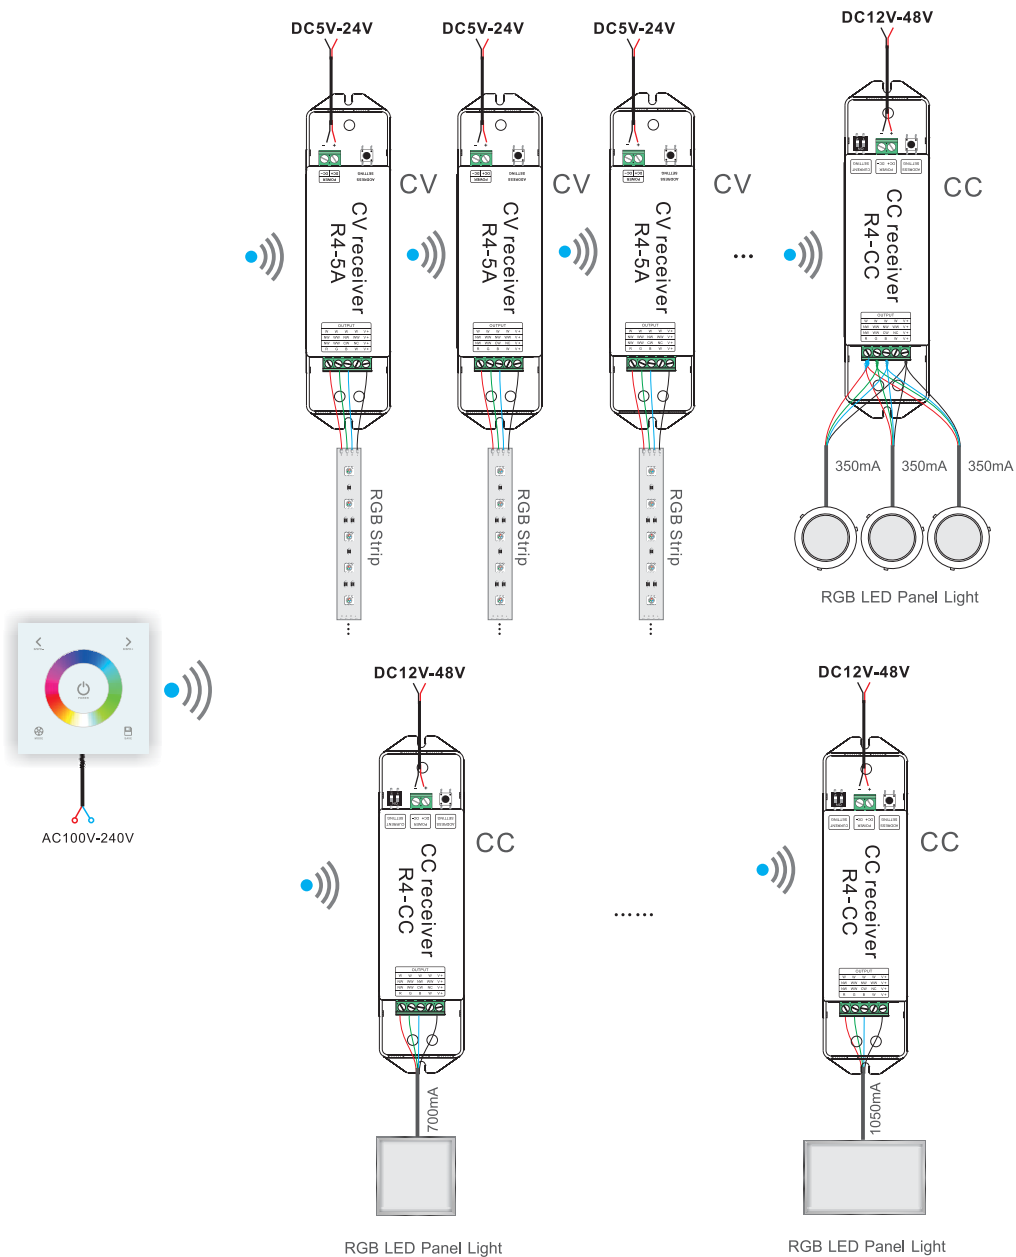

## 9. Wiring Diagram 2 ( Connect to DMX Decoder ):

