


2.4G LED Dim Controller



Main Characteristics

V1 RF Dim Remote Control

- Remote Option: Dim
- Working Voltage: 3V DC (Battery CR2032)
- Wireless Frequency: 2.4GHz
- Visual Distance: 30m
- Working Temperature: -20°C~50°C
- Package Size: L150×W46×H18(mm)
- Weight(G.W.): 80g

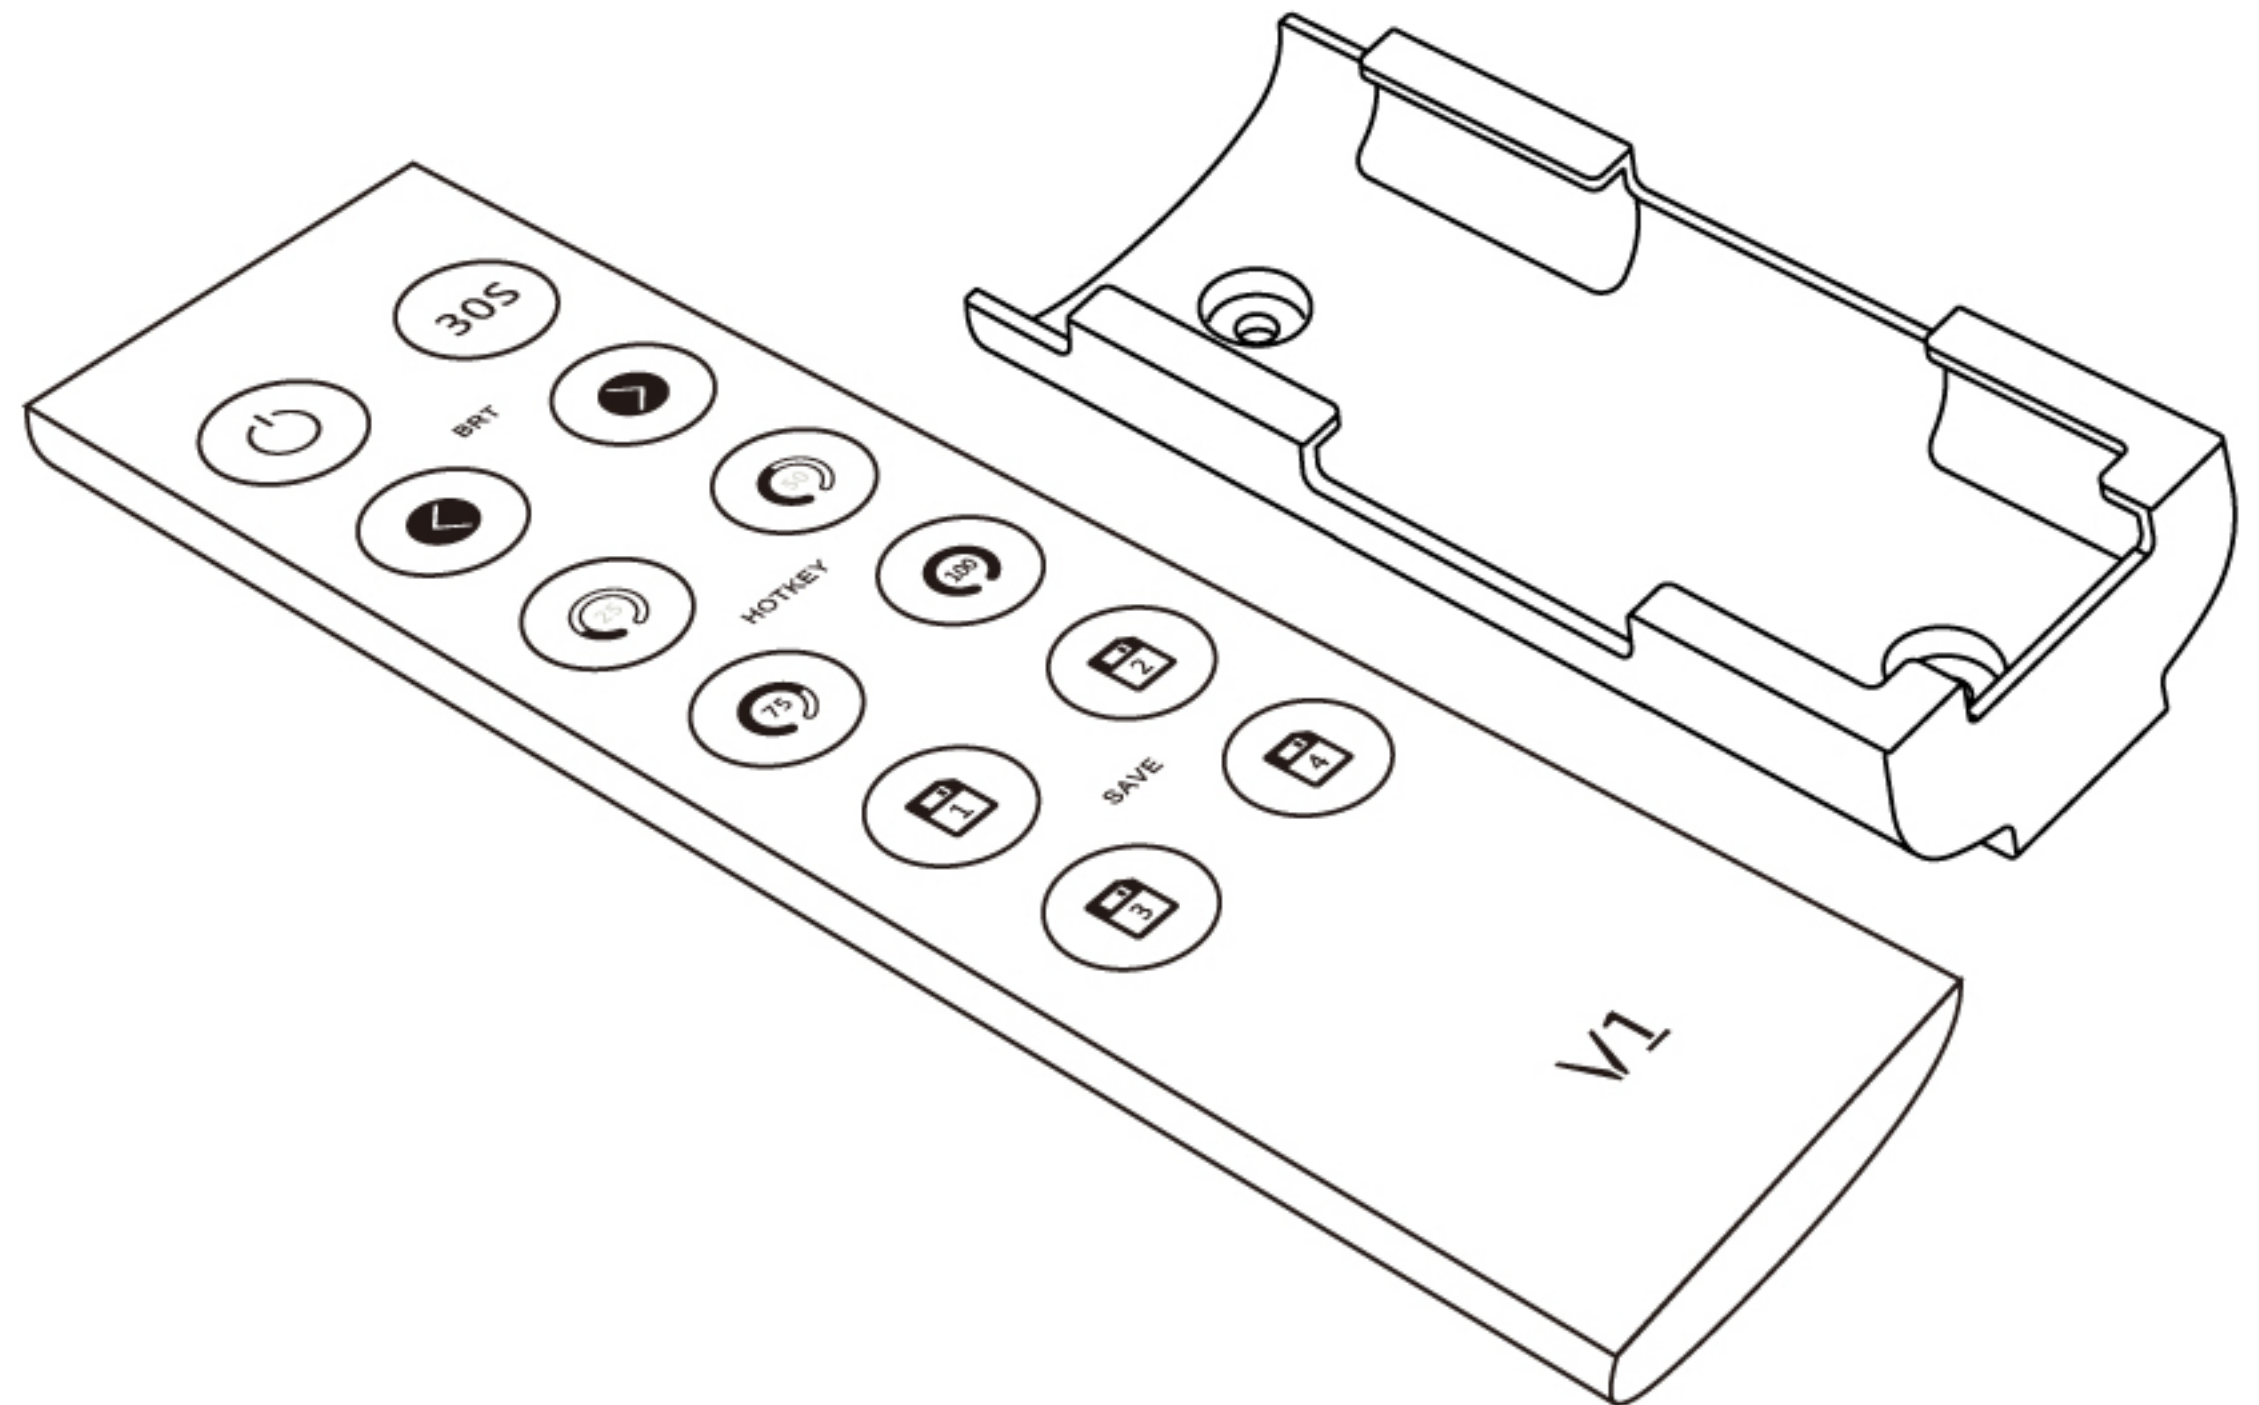


R4-5A CV Receiver

- Input Voltage: 5~24V DC
- Max Current Load: 5A × 4A Max. 20A
- Max Output Power: 100W/240W/480W(5V/12V/24V)
- Working Temperature: -30°C~55°C
- Package Size: L178×W48×H33(mm)
- Weight(G.W.): 150g


R4-CC CC Receiver

- Input Voltage: 12~48V DC
- Output Voltage: 3~46V DC
- Output Current: CC 350/700/1050mA×4A
- Output Power: 1.05W~48.3W×4A Max 193.2W
- Working Temperature: -30°C~55°C
- Package Size: L178×W48×H33(mm)
- Weight(G.W.): 165g


Dimensions

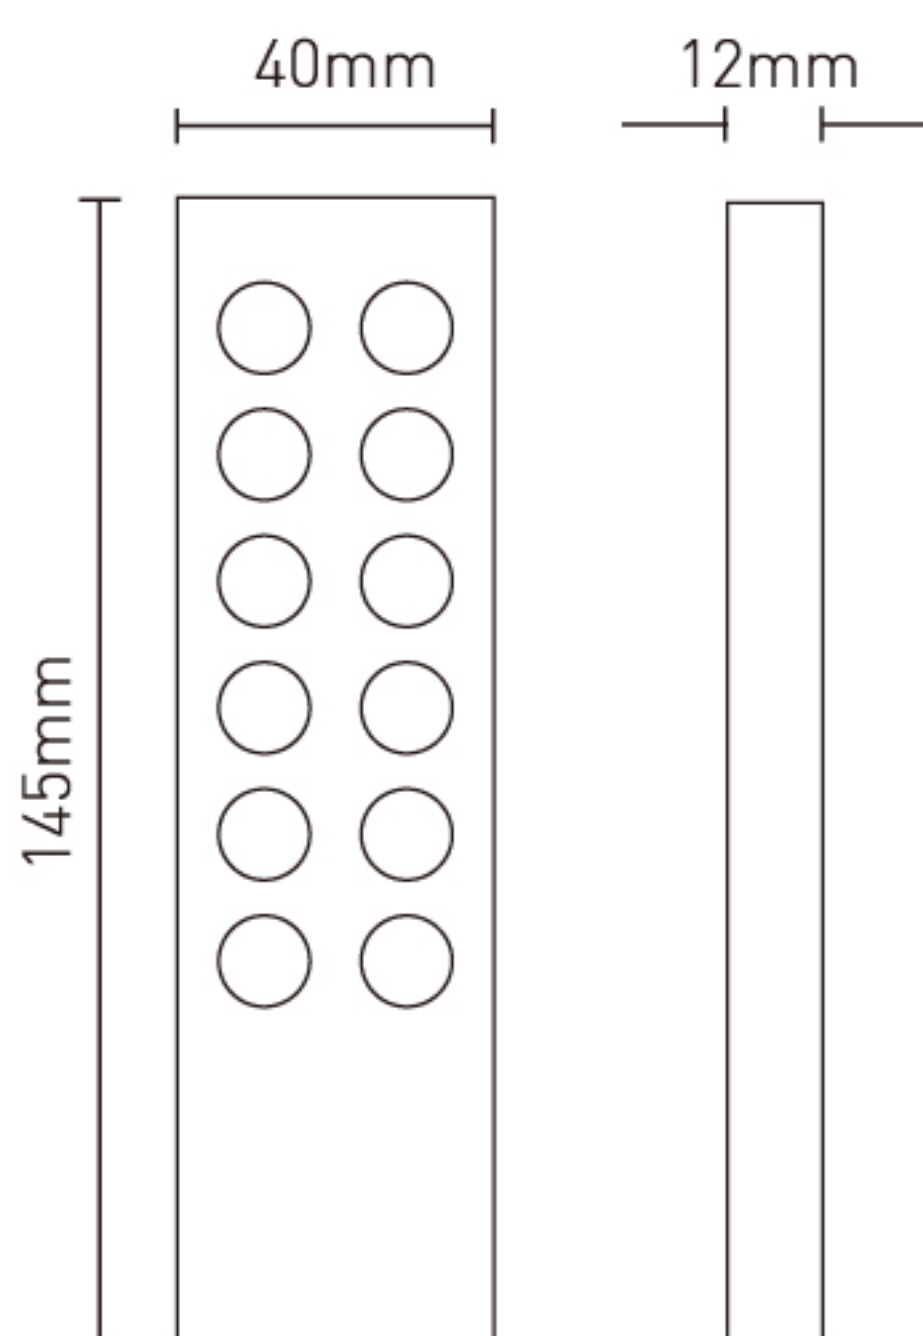

Remote

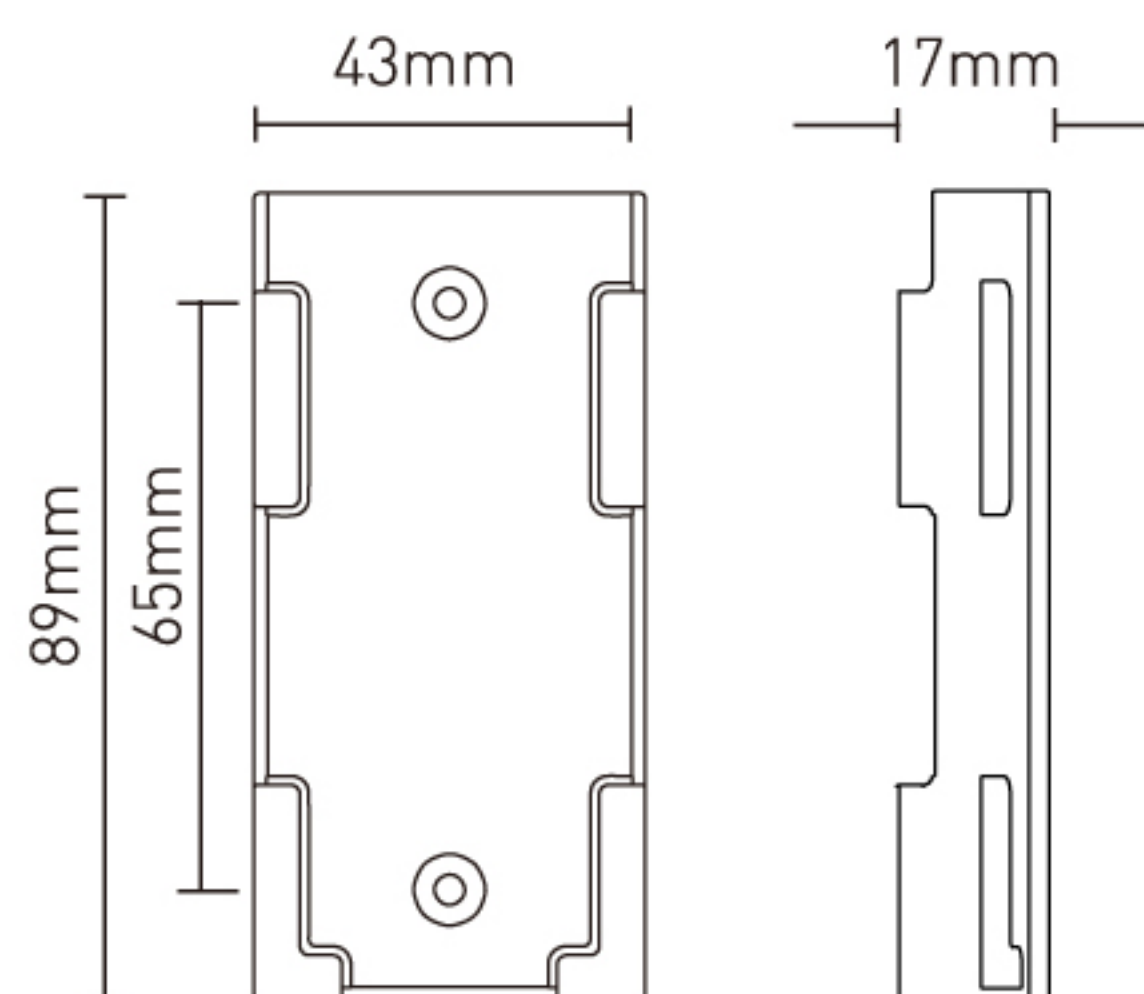

Holder

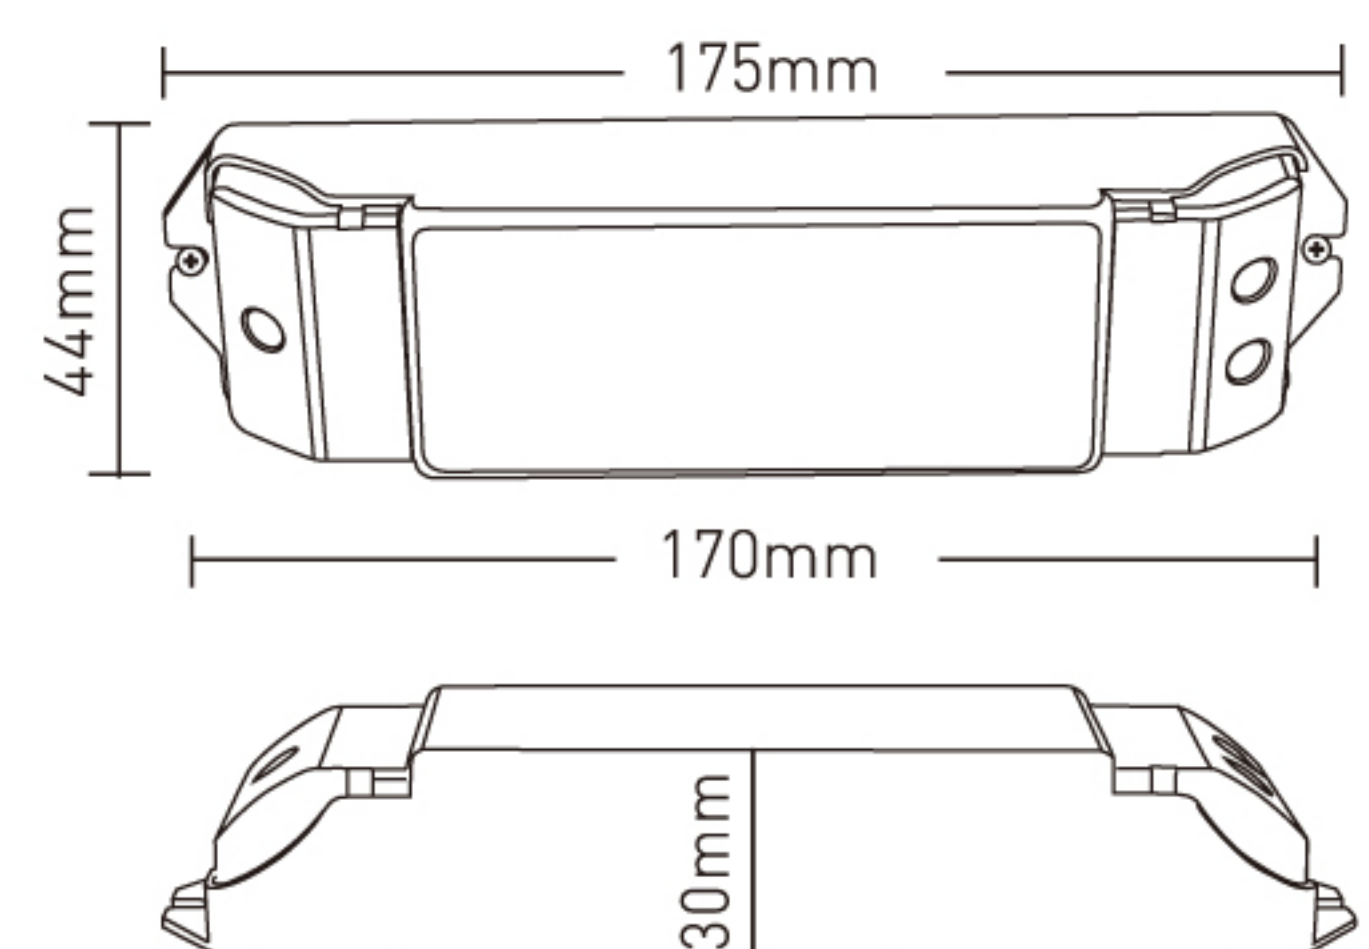

Receiver


2.4G LED Dim Controller



Main Characteristics

V1 RF Dim Remote Control

- Remote Option: Dim
- Working Voltage: 3V DC (Battery CR2032)
- Wireless Frequency: 2.4GHz
- Visual Distance: 30m
- Working Temperature: -20°C~50°C
- Package Size: L150×W46×H18(mm)
- Weight(G.W.): 80g

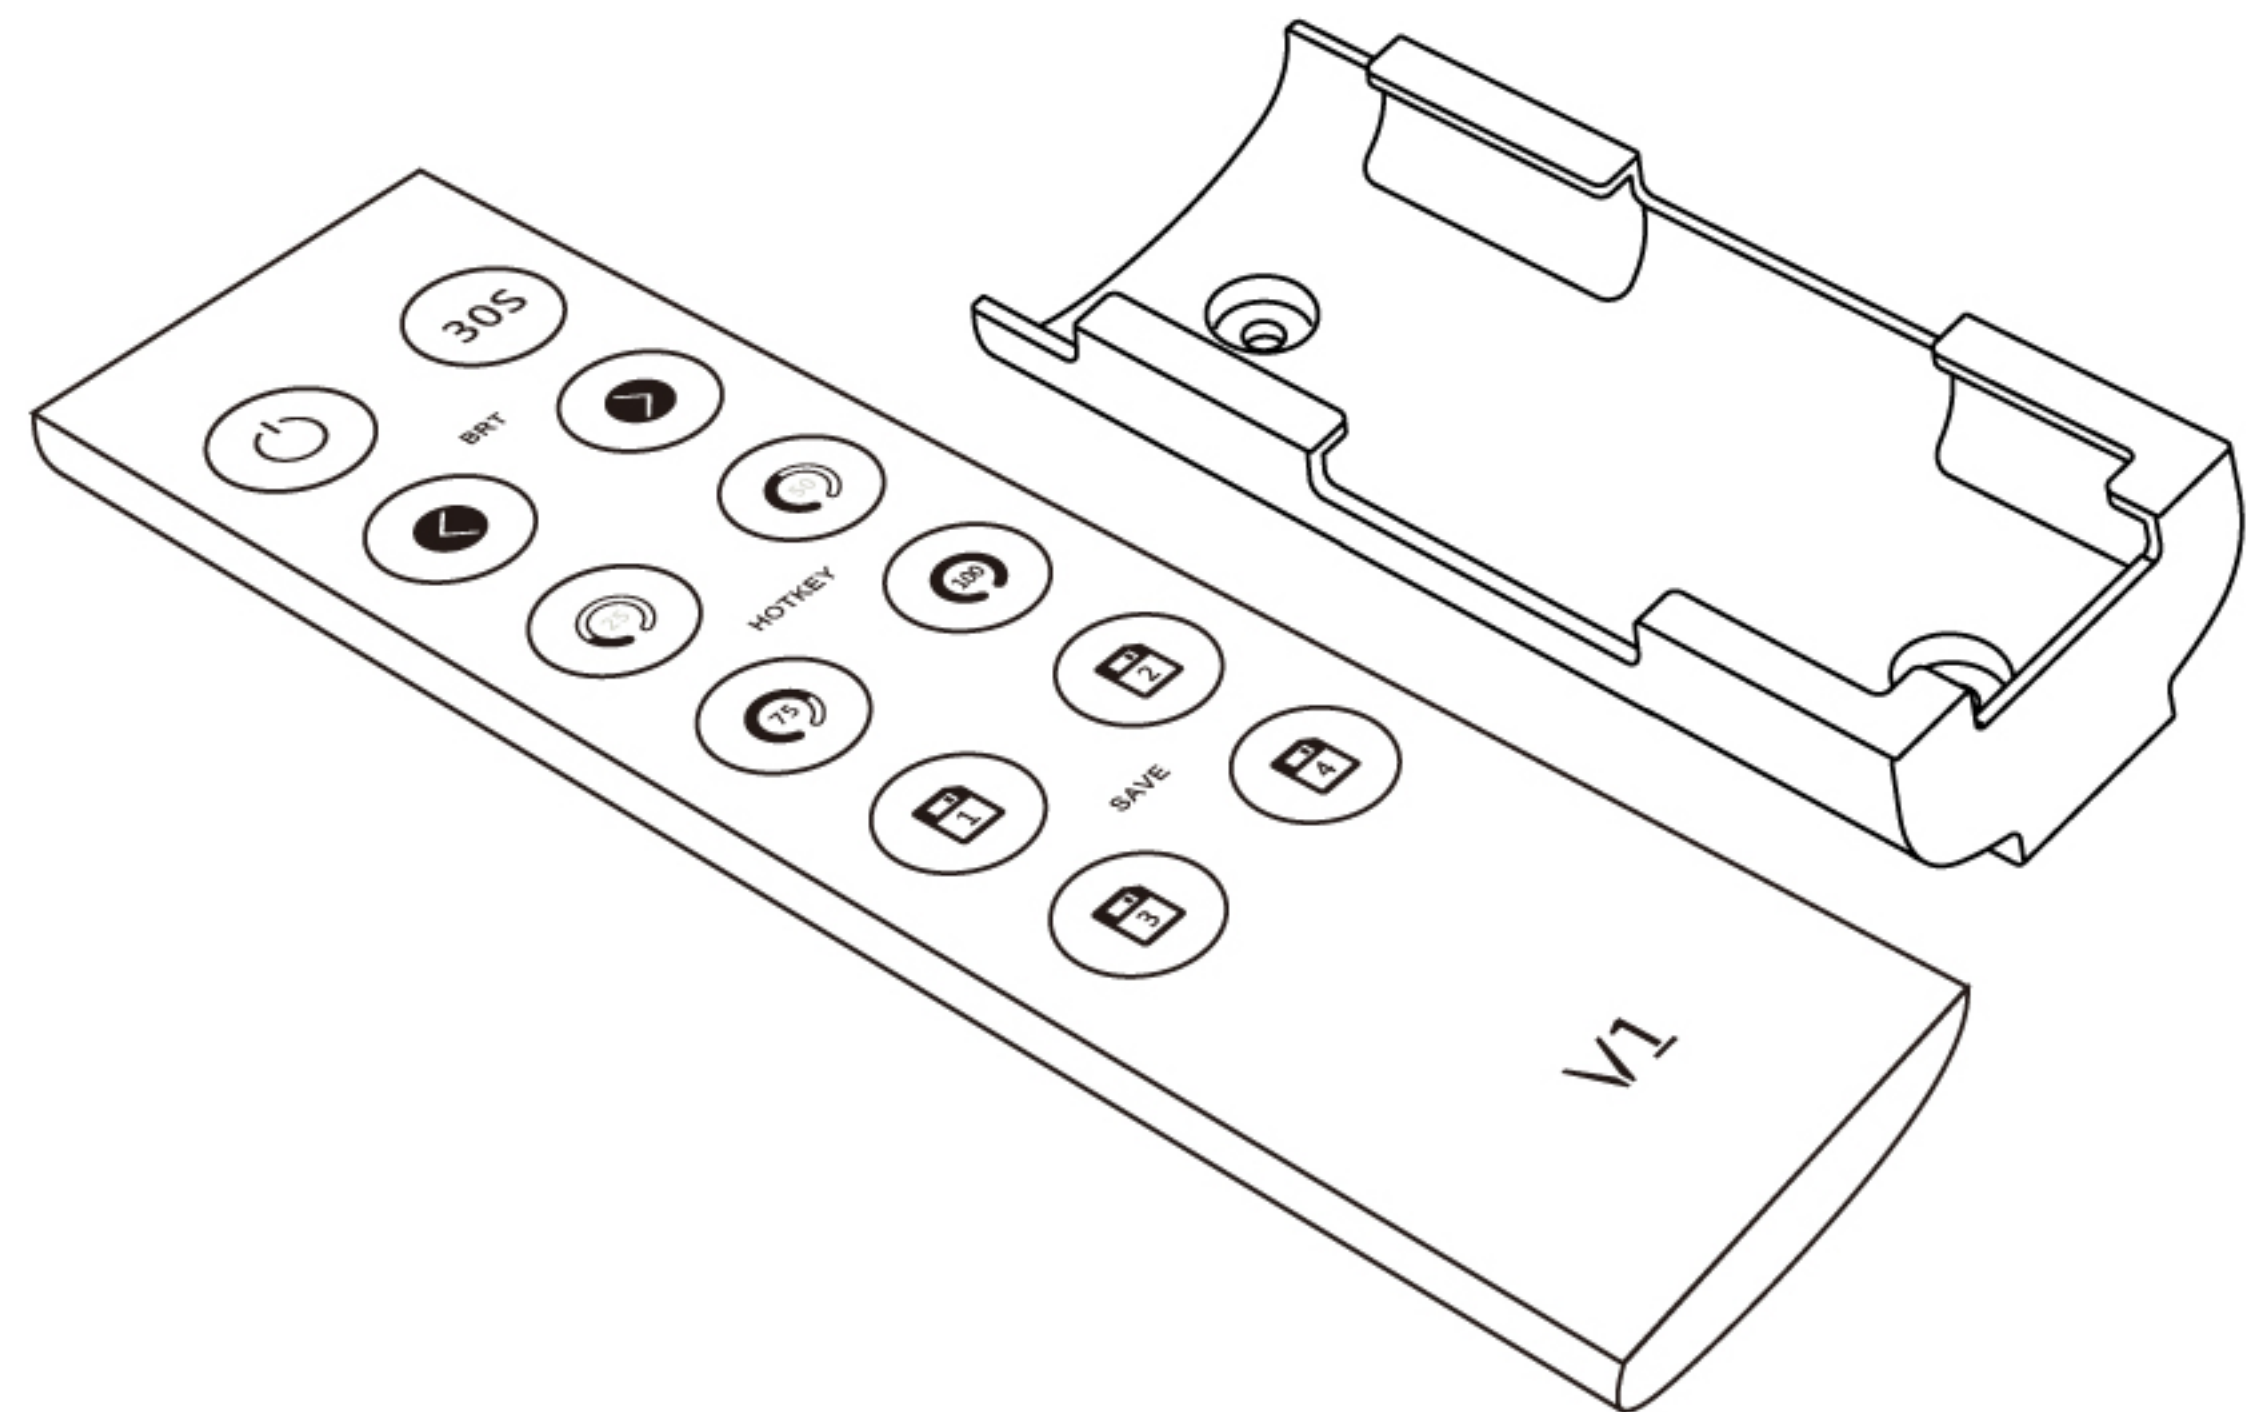


R4-5A CV Receiver

- Input Voltage: 5~24V DC
- Max Current Load: 5A × 4A Max. 20A
- Max Output Power: 100W/240W/480W(5V/12V/24V)
- Working Temperature: -30°C~55°C
- Package Size: L178×W48×H33(mm)
- Weight(G.W.): 150g


R4-CC CC Receiver

- Input Voltage: 12~48V DC
- Output Voltage: 3~46V DC
- Output Current: CC 350/700/1050mA×4A
- Output Power: 1.05W~48.3W×4A Max 193.2W
- Working Temperature: -30°C~55°C
- Package Size: L178×W48×H33(mm)
- Weight(G.W.): 165g


Dimensions

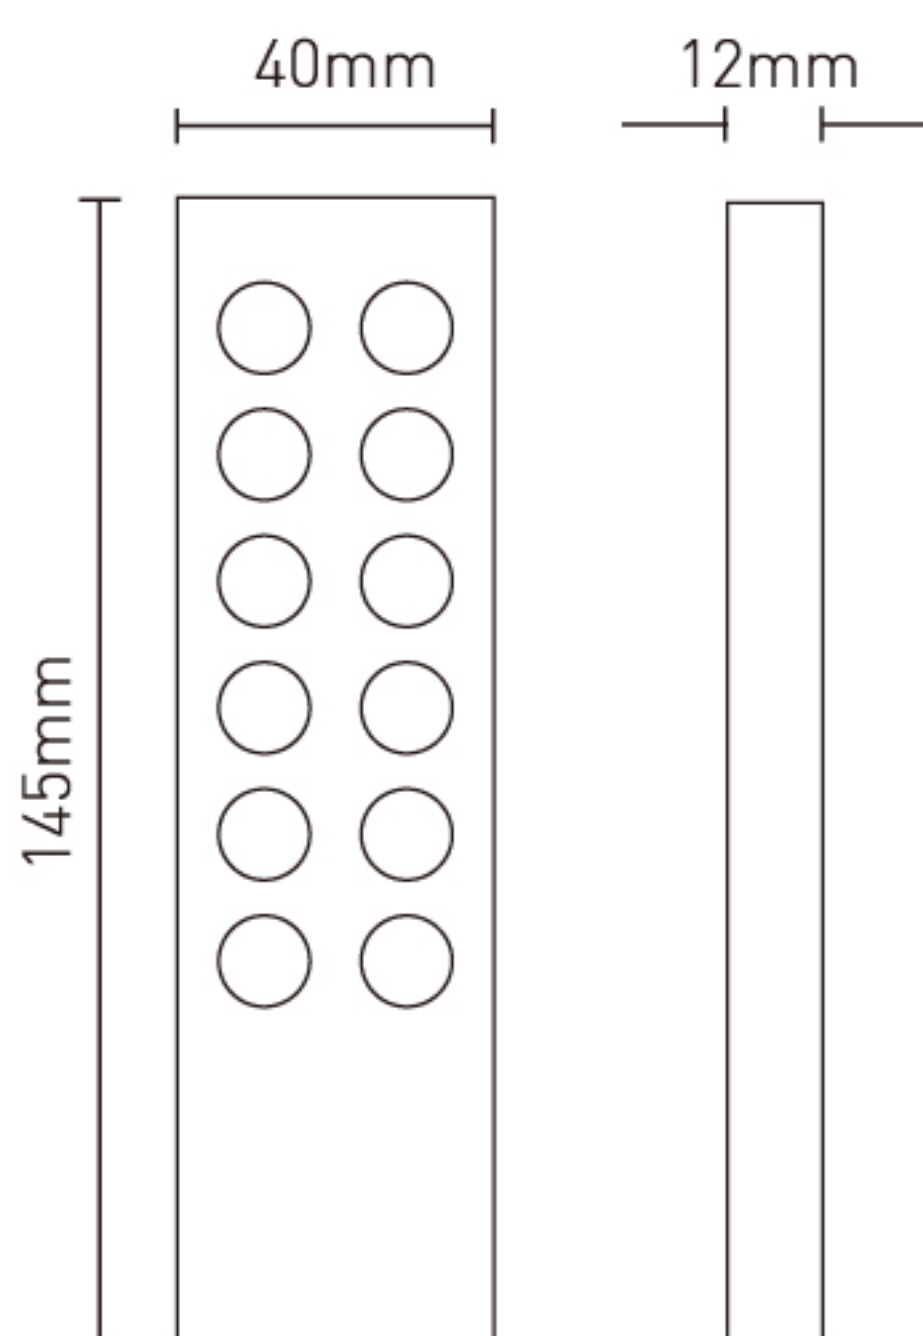

Remote

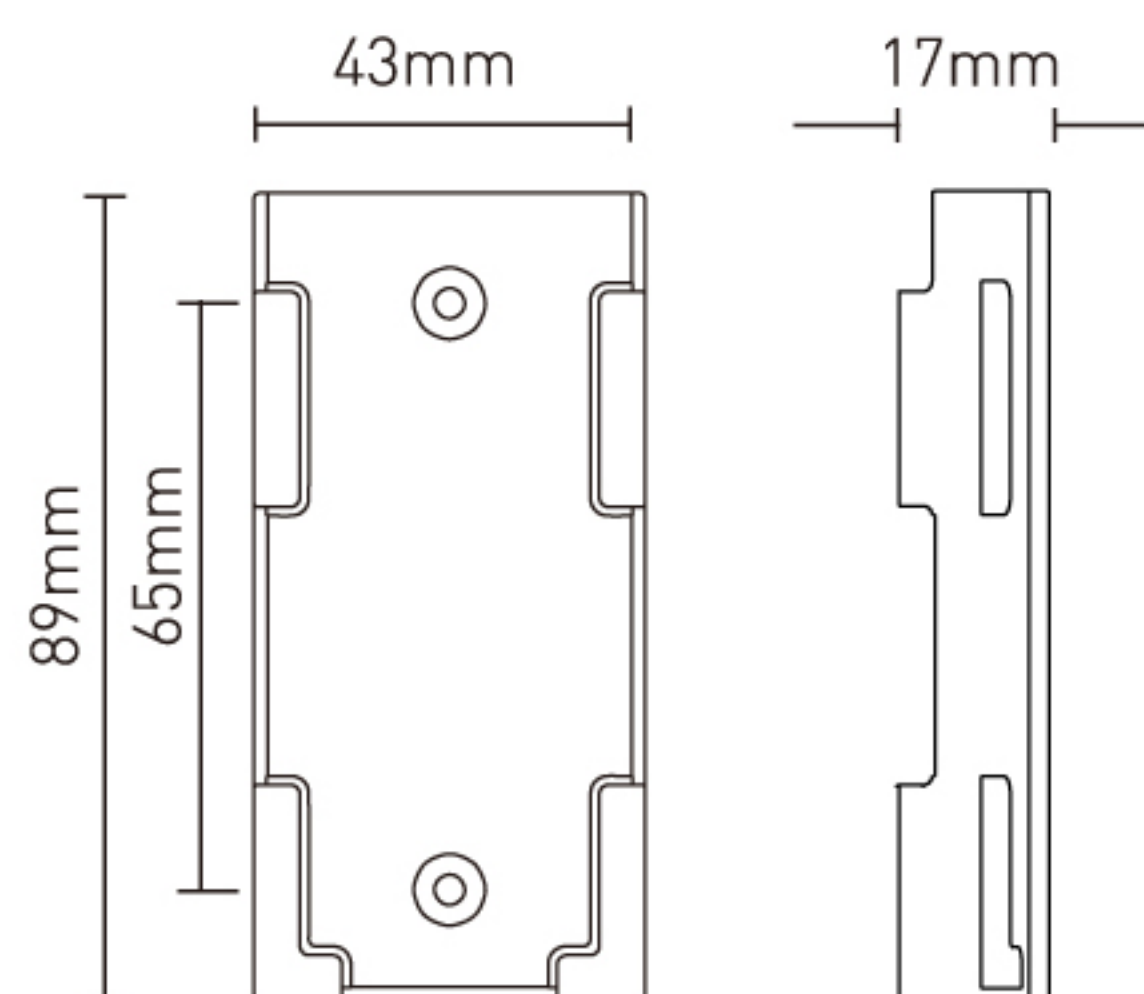

Holder

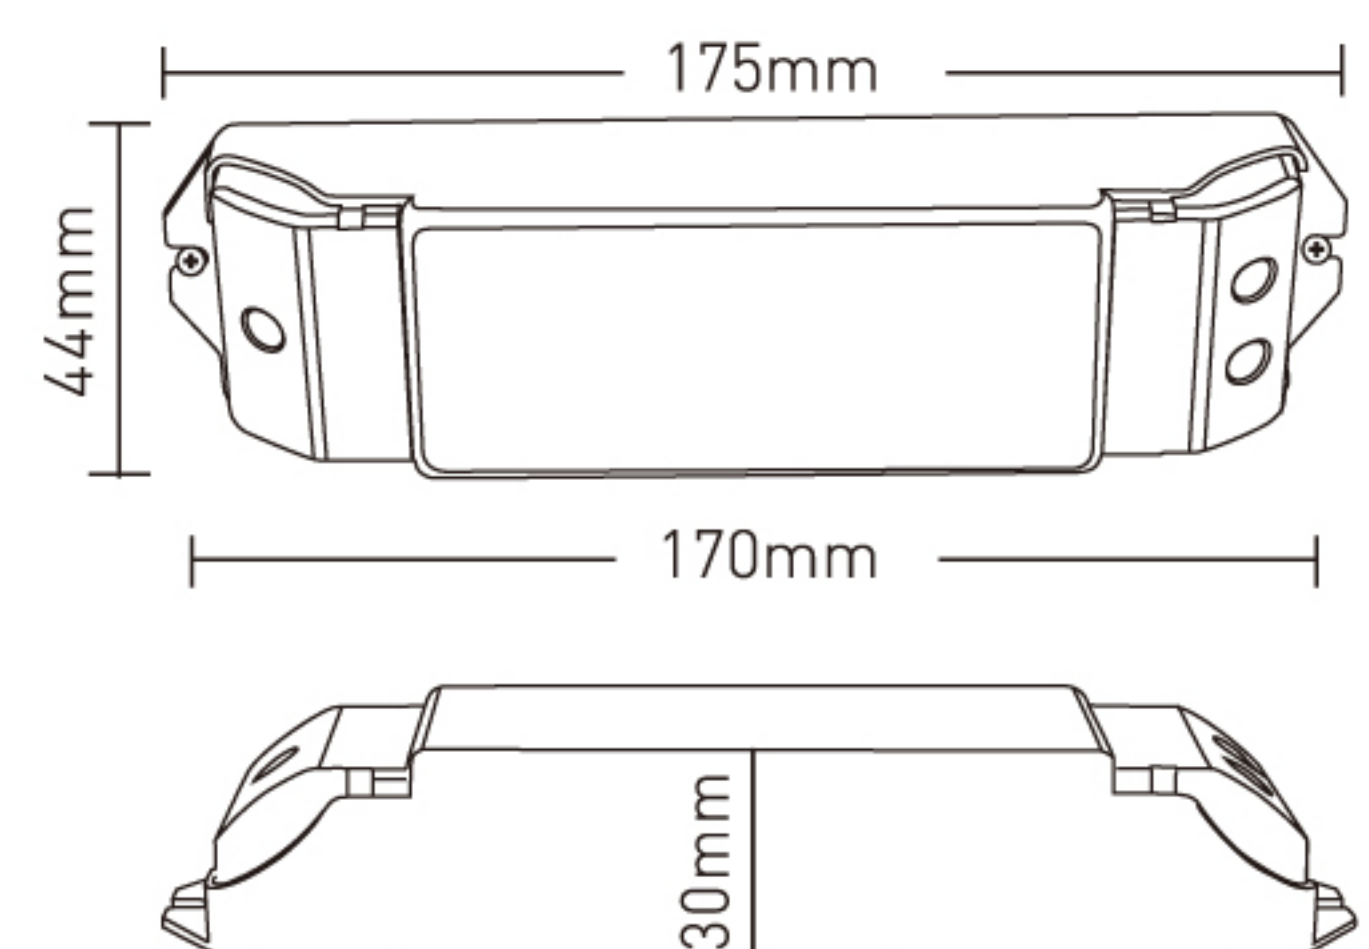

Receiver