


2.4G LED RGBW Controller



**Main Characteristics**

V4 RF RGBW Remote Control

- Remote Option: RGBW
- Working Voltage: 3V DC (Battery CR2032)
- Wireless Frequency: 2.4GHz
- Visual Distance: 30m
- Working Temperature: -20°C~50°C
- Package Size: L150×W46×H18(mm)
- Weight(G.W.): 80g

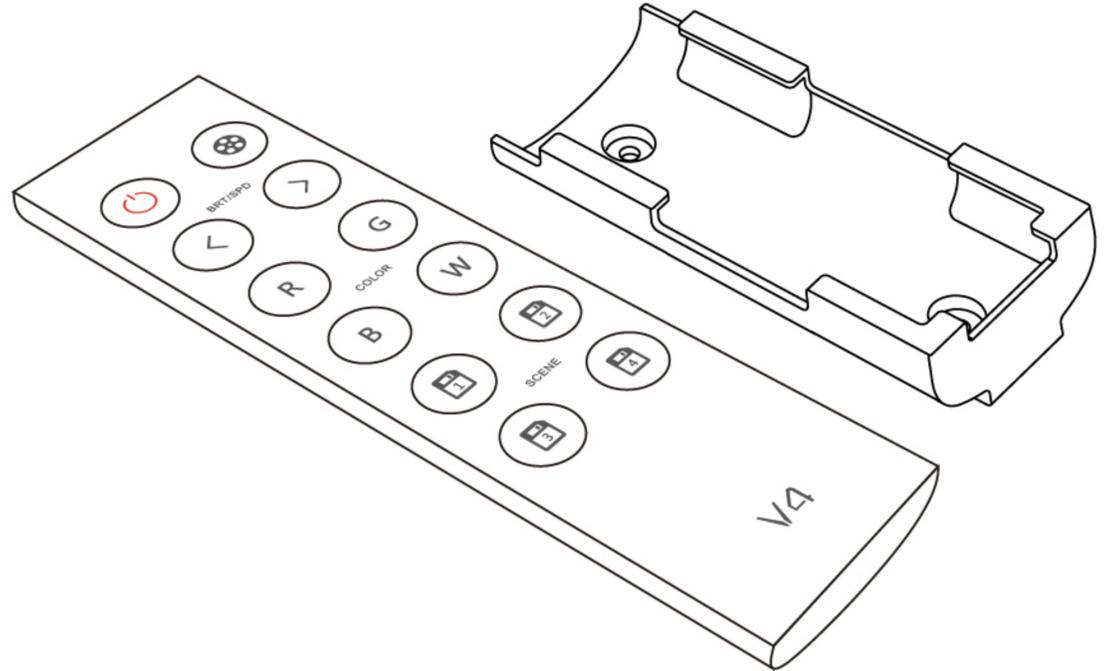


R4-5A CV Receiver

- Input Voltage: 5~24V DC
- Max Current Load: 5A × 4A Max. 20A
- Max Output Power: 100W/240W/480W(5V/12V/24V)
- Working Temperature: -30°C~55°C
- Package Size: L178×W48×H33(mm)
- Weight(G.W.): 150g


R4-CC CC Receiver

- Input Voltage: 12~48V DC
- Output Voltage: 3~46V DC
- Output Current: CC 350/700/1050mA×4A
- Output Power: 1.05W~48.3W×4A Max 193.2W
- Working Temperature: -30°C~55°C
- Package Size: L178×W48×H33(mm)
- Weight(G.W.): 165g


**Dimensions**

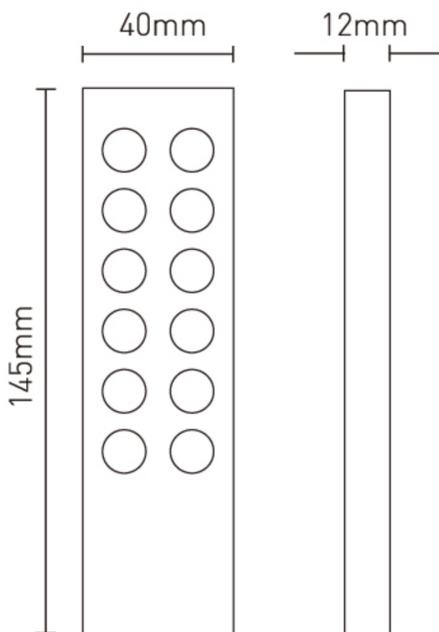

Remote

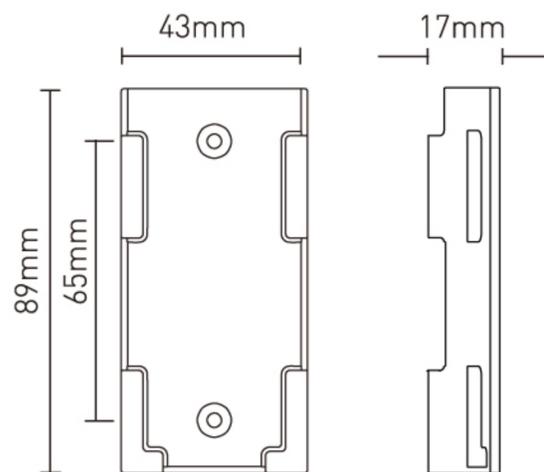


Holder

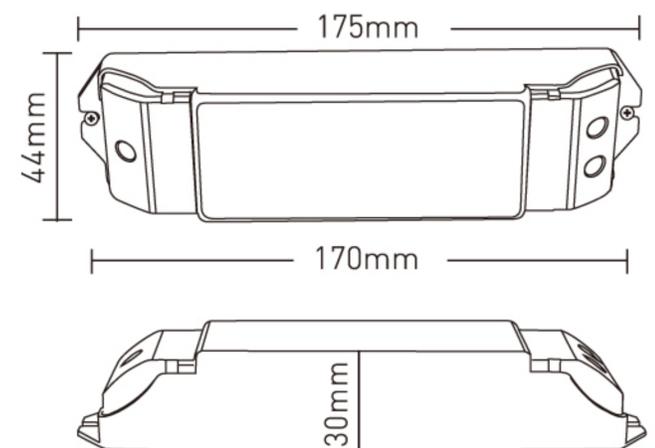

Receiver

## Operating Instruction for Remote:

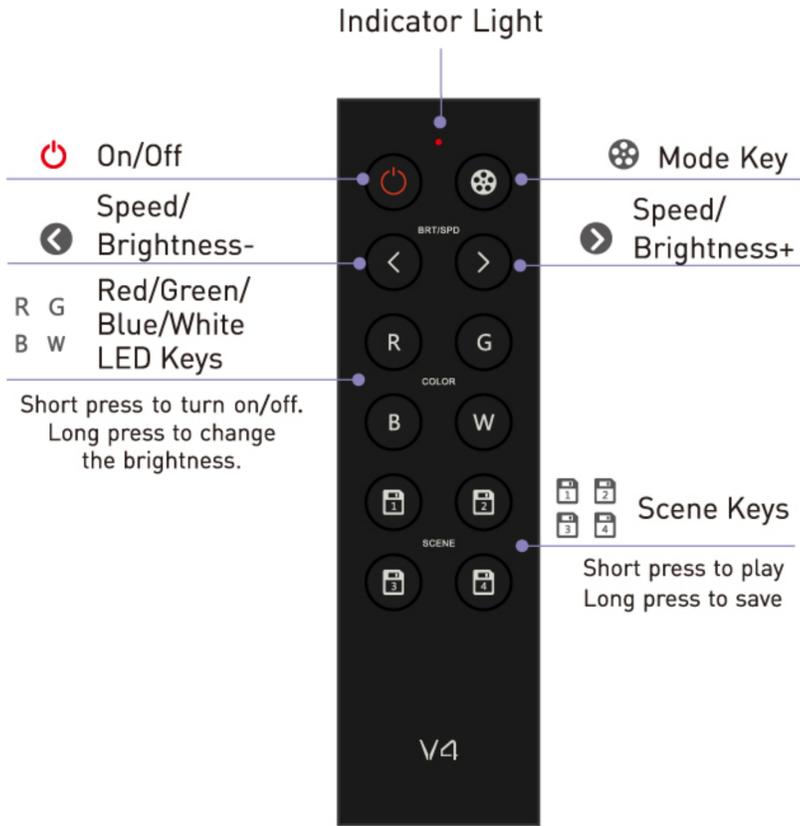

### ID learning between the remote and the receiver

**Learning ID:** Short press "ID learning button" on the R4-5A/R4-CC receiver, the running light keeps on. Then press any key on the remote, the running light on the receiver flicker several times, activated.

**Canceling ID:** Long press "ID learning button" on the R4-5A/R4-CC receiver for 5s, the running light flicker several times, canceled.

### ID Learning between the remotes


**Learning ID:** Assuming that remote B match up with remote A, first press the two bottom keys of remote B simultaneously until the indicator light keeps on. Then press any key on remote A in 5S. When the indicator of remote B turns off, ID learning is successful.

**Canceling ID:** Press the two bottom keys of remote B simultaneously (about 6S), the indicator light keeps on, canceled.


### The Changing Mode (Press ⌘ to Switch)

- A. Static Red
- B. Static Green
- C. Static Blue
- D. Static Yellow
- E. Static Purple
- F. Static Cyan
- G. Static White
- H. RGB Skipping
- I. 7 Colors Skipping
- J. RGB Smooth
- K. 7 Colors Smooth
- L. Static Black (only turn off RGB)

## Operating Instruction for Receiver:

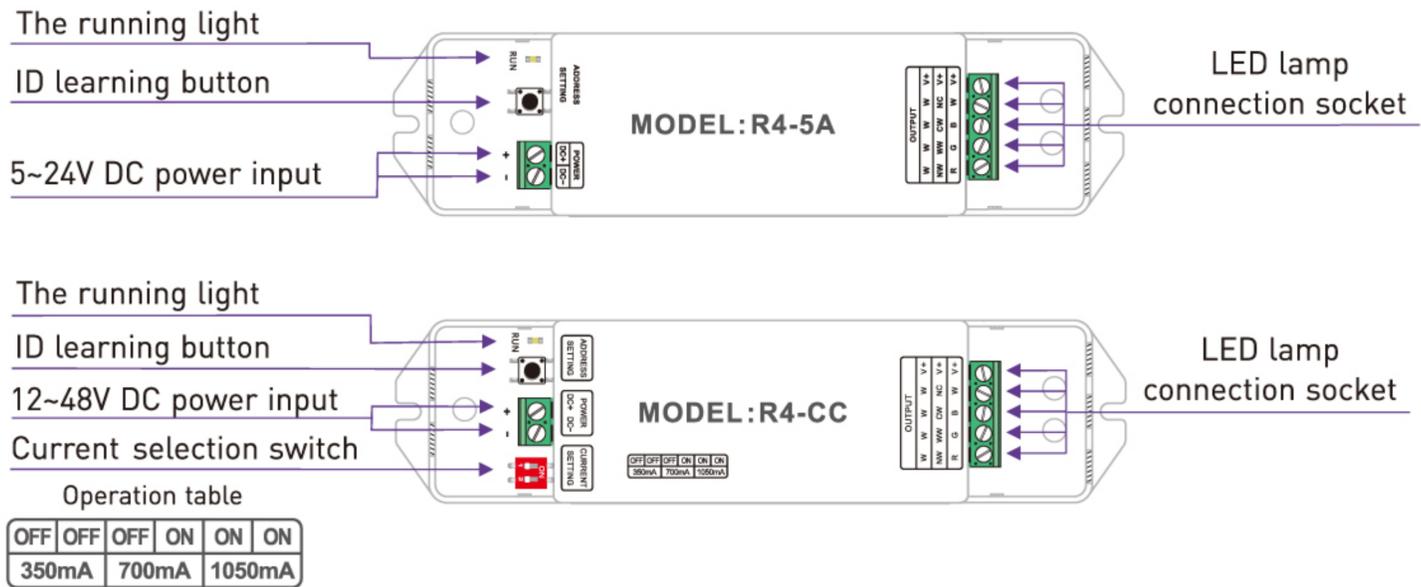

## Wiring Diagram :

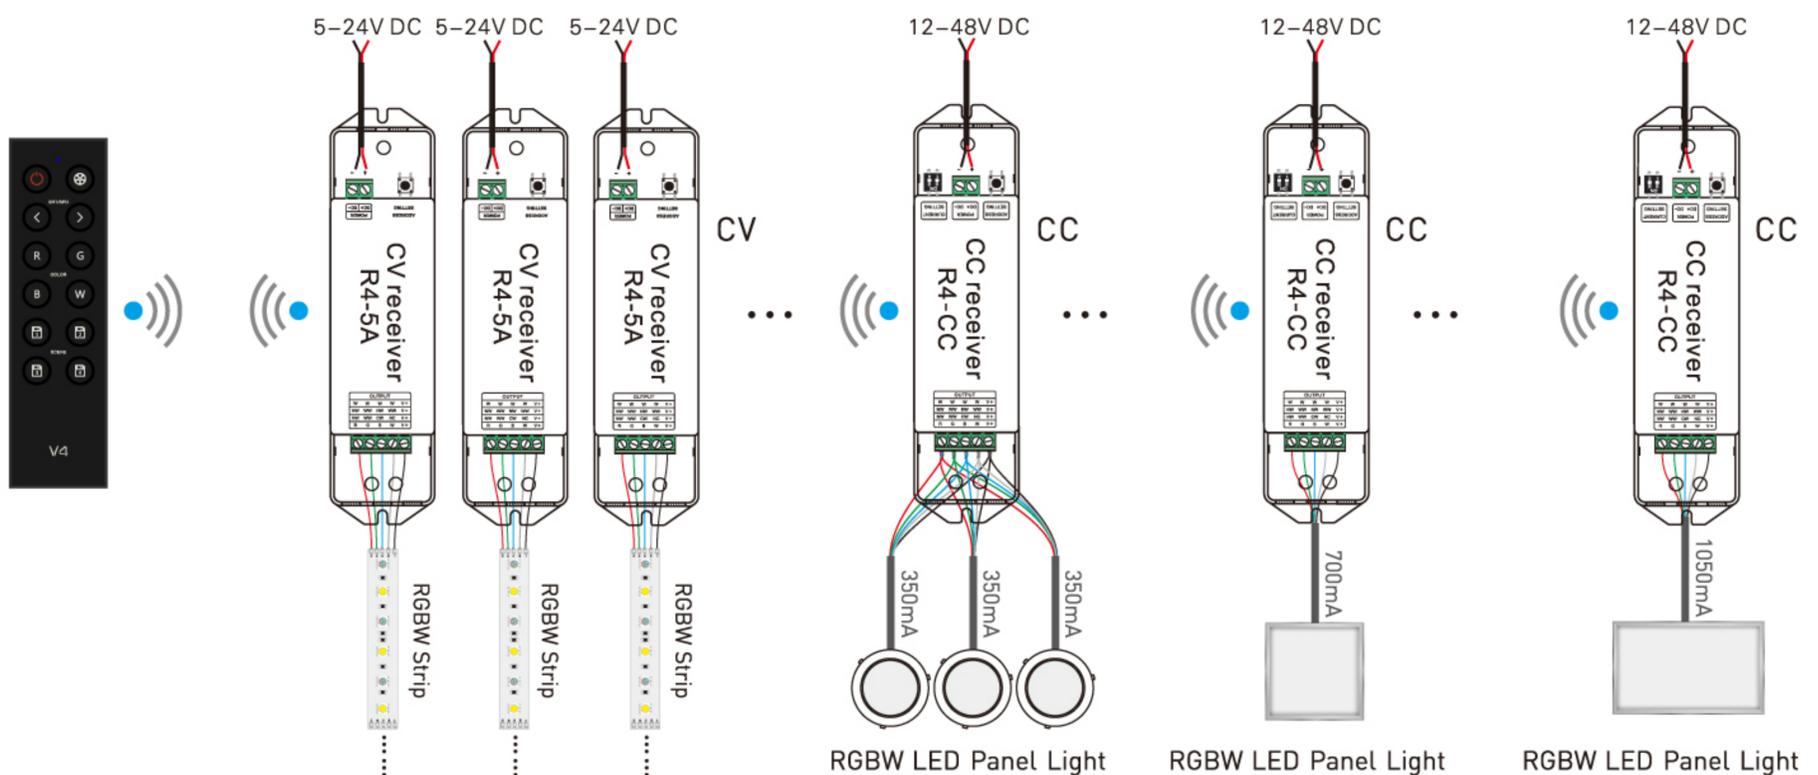

◆ Could connect RGB/RGBW LEDs.