

DALI LED Dimming Driver

0-72W...144W 6A 12-24V

- Dimming interface: DALI.
- PWM digital dimming, no alter LED color rendering index.
- Dimming range: 0.1~100%.
- Max. current output: 6A.
- Short circuit / Over-temperature / Over load protection.
- Full protective plastic housing.
- DALI bus standard: IEC62386.
- Suitable for indoor environments.




Main Characteristics


Dimming Interface: DALI (IEC62386)
 Input Voltage: 12-24V DC
 Output Voltage: 12-24V DC
 Output: 6A×1CH
 Max. Output Power: 0-72W...144W


Dimming Range: 0.1~100%
 Working Temperature: -30°C~55°C
 Product Size: L135×W30×H20(mm)
 Package Size: L140×W34×H23(mm)
 Weight[G.W.]: 65g

Dimensions

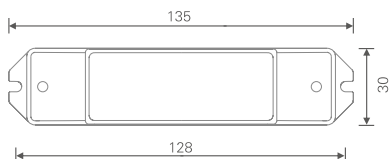

System Connection Diagram:

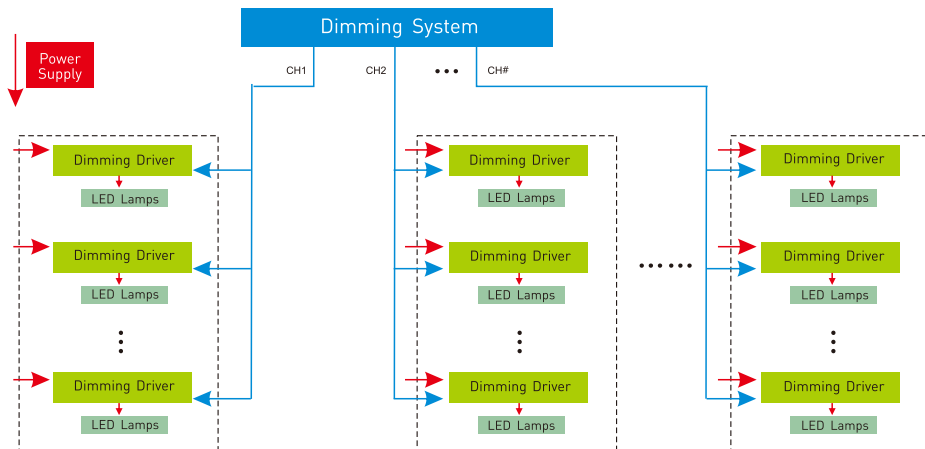



Two groups of
DALI signal socket



LED lamps connection socket
12-24V DC power input socket

DALI bus no need
distinguish
plus-minus polarity.

12V lamp connected, loads 1~72W[12V]. 24V lamp connected, loads 1~144W[24V].

